


Hi-Finity

Sliding Systems

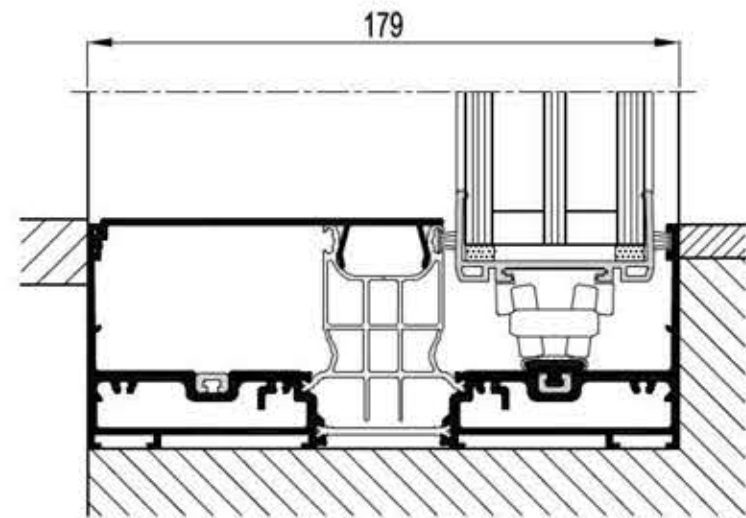

The infinite view


Enjoy an infinite view with ultimate performances! The ultra-slim design of the Hi-Finity sliding door creates large transparent surfaces, with a light, sleek and elegant appearance.

This fully transparent and accessible sliding door seamlessly extends the house's interior to the outside. Despite the minimal visual sidelines, the system's high strength allows Hi-Finity to carry the weight of a large sliding glass pane up to 750 kilograms. Fixed panels up to 1200 kg.

This in combination with the high energy performance and the minimalistic look makes this product the best solution for low-energy contemporary architecture.

For a higher level of comfort a concealed motor allows you to open the vents with the push of a button, or by connecting the motor to your home automation system. This high performance motor guarantees optimum convenience during use and is a safe and reliable solution.

Hi-Finity is an exclusive system for certified fabricators.

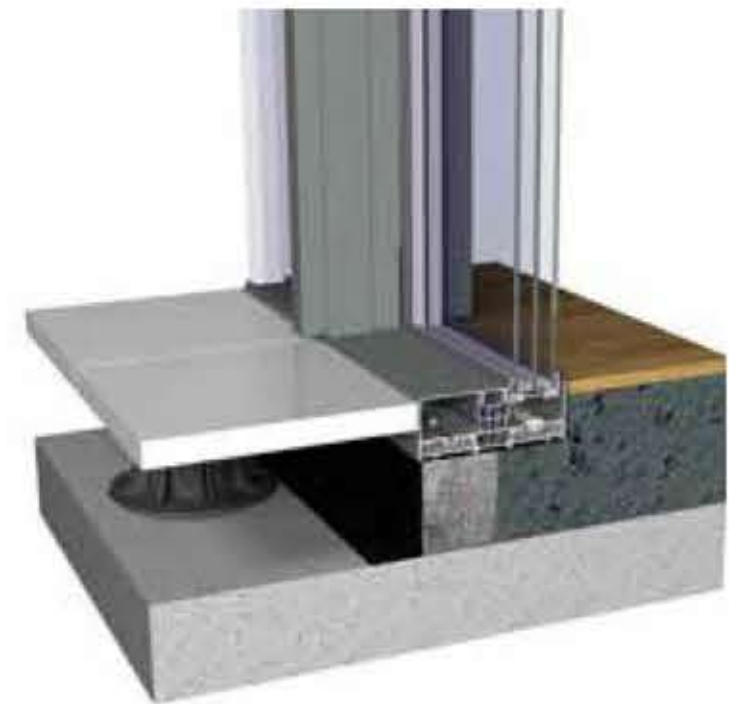

TECHNICAL CHARACTERISTICS

Height	Build-in frame
Visible width / height	Vent
	Meeting section
	Meeting section 4 doors
Overall system depth	Frame
	Vent
Maximal element height	
Maximal vent weight	
Glass thickness	

Double glazing

Triple glazing

68 mm / 100 mm	68 mm / 100 mm
8 mm	10 mm
35 mm (adjustable)	35 mm (adjustable)
67 mm (adjustable)	69 mm (adjustable)
Duo Rail : 147 mm 3-Rail : 234 mm	Duo Rail : 179 mm 3-Rail : 282 mm
44 mm	60 mm
3500 mm	
300 kg manual / 750 kg motorized / 1200 kg fixed	
36-38 mm	52-54 mm

PERFORMANCES

Thermal insulation
Acoustic performance
Air tightness
Wind load resistance
Water tightness
Burglar resistance

Uw-value down to 1.4 W/m²K, depending on the frame/vent and the glazing thickness.

Rw(C;Ctr) = 43 (-1;-3) dB

Up to 600 Pa (class 4)

Up to 1600 Pa (Class 4B)

Up to 600 Pa (class 9A)

Up to RC 2 (EN 1627)